





1G/10G Passive Fiber TAPs Multi-mode | Breakout Network TAPs




Network test access points (TAPs) are hardware tools that allow you to monitor your network. All fiber breakout TAPs are passive, purpose-built hardware devices that make a 100% copy of your network's data allowing your monitoring tools to see every bit, byte and packet.[®]

Passive TAPs are non-powered devices that will not cause the live network devices to loose link between one another if power is lost.

Key Features •

- Tested and certified by Big Switch Networks
- Exclusive Network TAP vendor of Big Switch Networks
- 100% network visibility
- 100% secure and invisible; no IP address; no Mac address; cannot be hacked
- Passes physical layer errors
- Supports Breakout Mode
- Supports Jumbo frames
- 1U rack mount kit holds up to 4 modules, each module can have 1, 2, 3 or 4 TAPs
- Plug & Play easy installation, no configuration; no power source required

Network Flow •

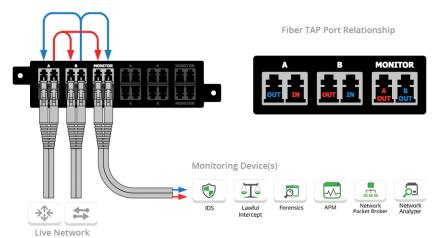

APPLICATIONS:

- Network & Application Monitoring
- Network & Application Analysis
- Network & Application Performance

SOLUTIONS:

 \bigcirc

IDS

арм

Lawful

Network Packet Broker

DP

DPI

Network Analyzer

õ

Forensics

Passive optical TAPs are ideal for:

Intrusion Detection Systems

Application Performance Monitoring

Lawful Interception



Packet Capture

Deep Packet Inspection

Network Analyzer

Forensics




1G/10G Passive Fiber TAPs

Modular | Multi-mode | Breakout Network TAPs

Model #	Network Speed	Ports	# of TAPs	Split Ratio*	Wavelengths	Media	Connnector/Mode	Additional Specifications
OM1501	Up to 10G		1	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	Multimode
OM1701	Up to 10G		1	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	Fiber Type: Corning 62.5/125 or
OM3501	Up to 10G		1	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber	50/125 micron
OM4501	Up to 10G		1	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	Directivity: ≥40dB
OM4701	Up to 10G		1	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	Temperature: -40 to +85C
OM1502	Up to 10G		2	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	Packaging: Stainless
OM1702	Up to 10G		2	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	steel tube, 3.05mm (dia) x 55mm (len)
OM3502	Up to 10G		2	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber	
OM4502	Up to 10G		2	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	
OM4702	Up to 10G		2	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	Additional Dimensions:
OM1503	Up to 10G		3	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	(WxHxD): 3.9" x 1.72" x 6.8" (99.06mm x
OM1703	Up to 10G		3	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	43.69mm x 172.72mm)
OM3503	Up to 10G		3	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber	Weight: 1.45 lbs (0.66 kg)
OM4503	Up to 10G		3	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	Ambient Temperature: 0C to +40C / +32E to
OM4703	Up to 10G		3	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	+104F
OM1504	Up to 10G		4	50/50	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	Storage Temperature: -20C to +70C / -4F to
OM1704	Up to 10G		4	70/30	850/1300nm	Fiber-OM1	Fiber-LC Multi-Mode Fiber	+158F Humidity:
OM3504	Up to 10G		4	50/50	850/1300nm	Fiber-OM3	Fiber-LC Multi-Mode Fiber	90% non-condensing
OM4504	Up to 10G		4	50/50	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	*There is no power needed for these TAPs
OM4704	Up to 10G		4	70/30	850nm	Fiber-OM3/OM4	Fiber-LC Multi-Mode Fiber	
RMP-1U	1U Rack Mount Kit - Hold up to 4 Modules, each Module can have 1, 2, 3 or 4 TAPs							

* Custom split ratios are available in **60/40, 80/20 or 90/10**, please inquire.

Use Case

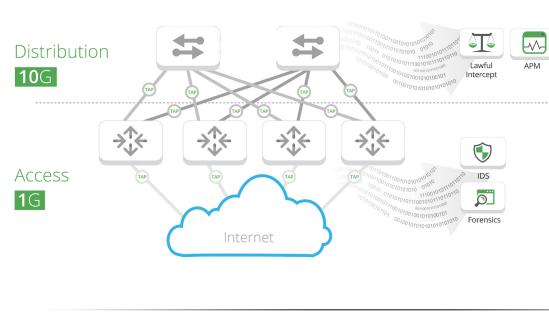

Insertion Loss

	Split Ratio*	Network Port	Monitor Port	
	50/50	4.5dB	4.5dB	
_	60/40	3.1dB	5.1dB	
	70/30	2.4dB	6.3dB	
	80/20	1.8dB	8.1dB	
	90/10	1.3dB	11.5dB	



Garland Technology Network TAPs A Certified Big Switch Networks Solution



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2015 Garland Technology LLC. All Rights Reserved