



1G/10G/40G/100G Passive Fiber TAPs Single-mode | Breakout Network TAPs




Network test access points (TAPs) are hardware tools that allow you to monitor your network. All fiber breakout TAPs are passive, purpose-built hardware devices that make a 100% copy of your network's data allowing your monitoring tools to see every bit, byte and packet.[®]

Passive TAPs are non-powered devices that will not cause the live network devices to loose link between one another if power is lost.

Key Features •

- Tested and certified by Big Switch Networks
- Exclusive Network TAP vendor of Big Switch Networks
- 100% network visibility
- 100% secure and invisible; no IP address; no Mac address; cannot be hacked
- Passes physical layer errors
- Supports Breakout Mode
- Supports Jumbo frames
- 1U rack mount kit holds up to 4 modules, each module can have 1, 2, 3 or 4 TAPs
- Plug & Play easy installation, no configuration; no power source required

Network Flow

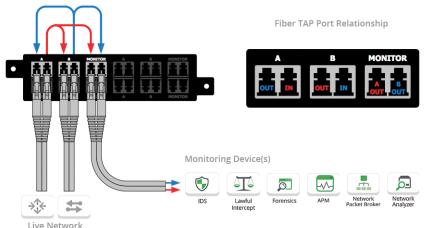

APPLICATIONS:

- > Network & Application Monitoring
- > Network & Application Analysis
- > Network & Application Performance
- > Data Center-Longhaul fiber environment

➡ Breakout Mode is ideal when utilization is very high and packet loss is not an option.

SOLUTIONS:

Passive optical TAPs are ideal for:



Lawful Intercept

-

Network Packet Brok

DP

Forensics

Intrusion Detection Systems

Application Performance Monitoring

Lawful Interception

Packet Capture

Deep Packet Inspection

DPI N Network Analyzer Fc

Network Analyzer

Forensics

Competitive Edge Ϲ

• No upgrade needed. Unlike the competition, this handles your network today and tomorrow and will work in all of your applications.

• Supports long range and extended range single-mode environments.

• Made, tested and certified in the USA

Have Questions?

sales@garlandtechnology.com +716.242.8500 garlandtechnology.com



1G/10G/40G/100G Passive Fiber TAPs

Modular | Single-mode | Breakout Network TAPs


Model #	Network Speed	Ports	# of TAPs	Split Ratio*	Wavelengths	Media	Connnector/Mode	Additional Specifications
OS1501	Up to 100G	0 99.96 0	1	50/50	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	Single mode
OS1701	Up to 100G	0 99 00 0	1	70/30	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	Fiber Type: Corning 9/125 micron
OS2501	Up to 100G	0 22 00 0	1	50/50	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	Directivity: ≥50dB
OS2701	Up to 100G	0 22 00 0	1	70/30	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	Temperature: -40 to +85C
OS1502	Up to 100G	•	2	50/50	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	Packaging: Stainless steel tube, 3.05mm
OS1702	Up to 100G	•	2	70/30	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	(dia) x 55mm (len)
OS2502	Up to 100G	•	2	50/50	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	
OS2702	Up to 100G	•	2	70/30	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	Additional Dimensions:
OS1503	Up to 100G		3	50/50	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	(WxHxD): 3.9" x 1.72" x 6.8" (99.06mm x
OS1703	Up to 100G	•	3	70/30	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	43.69mm x 172.72mm) Weight:
OS2503	Up to 100G		3	50/50	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	1.45 lbs (0.66 kg) Ambient Temperature: 0C to +40C / +32F to
OS2703	Up to 100G		3	70/30	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	+104F Storage Temperature:
OS1504	Up to 100G		4	50/50	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	-20C to +70C / -4F to +158F
OS1704	Up to 100G		4	70/30	1310/1550nm	Fiber-OS1	Fiber-LC Single-Mode Fiber	Humidity: 90% non-condensing
OS2504	Up to 100G	0 00 00 00 00 00 00 00 00 00 00 00 00 0	4	50/50	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	*There is no power needed for these TAPs
OS2704	Up to 100G	•	4	70/30	1310/1550nm	Fiber-OS2	Fiber-LC Single-Mode Fiber	
RMP-1U	J 1U Rack Mount Kit - Hold up to 4 Modules, each Module can have 1, 2, 3 or 4 TAPs]	

* Custom split ratios are available in 60/40, 80/20 or 90/10, please inquire.

Use Case

GARLAND

See every bit, byte, and packet

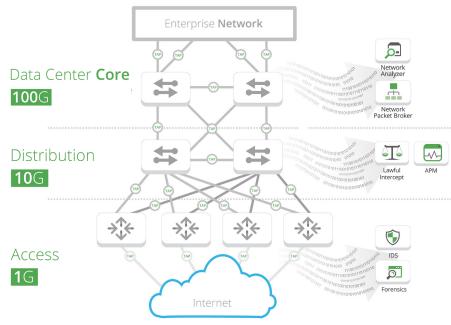

Insertion Loss

Split Ratio*	Network Port	Monitor Port
50/50	3.7dB	3.7dB
60/40	2.8dB	4.8dB
70/30	2.0dB	6.1dB
80/20	1.3dB	8.0dB
90/10	0.8dB	12.0dB



This document is for informational purposes only. The information in this document, believed by Garland Technology to be accurate as of the date of publication, is subject to change without notice. Garland Technology assumes no responsibility for any errors or omissions in this document and shall have no obligation to you as a result of having made this document available to you or based upon the information it contains. ©2015 Garland Technology LLC. All Rights Reserved